

# Texaa®

Specification and data sheets

# Vibrasto 30

<b>Vibrasto 30</b>	p. 3
Acoustic performance	p. 4
Specification	p. 5
Fitting methods	p. 6
<b>Aeria</b> - cleaning guidelines	p. 9
Technical characteristics	p. 10


### **Production time**

3 weeks

### **Professionals to be consulted for fitting**

Upholsterers and carpenters

# Vibrasto 30

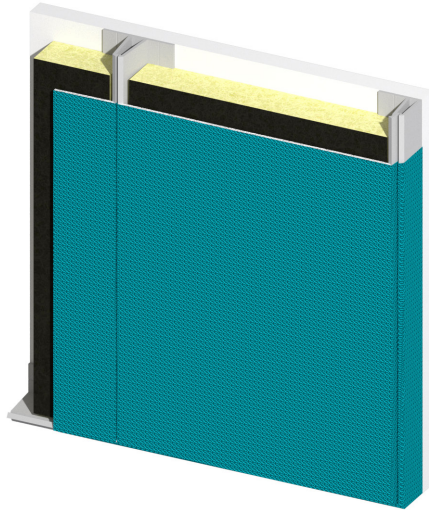

**Vibrasto 30** is flexible acoustic cladding that can be stretch-fitted to walls, ceilings or furniture. It comprises a highly flame-resistant facing, made of sound-transparent **Aeria\*** fabric, laminated onto wadding and stretch-fitted in front of a semi-rigid sound-absorbing material. Its simple fitting and value for money in terms of acoustic performance makes this an ideal product for covering large surface areas with a perfect finish at a manageable cost.

Width: 1,500 mm, thickness: 30 mm


---

\* **Aeria**, sound-transparent fabric, exclusively patented by **Texaa®**

# Acoustic performance

**For Vibrasto stretched and anchored against plasterboard screwed into a stud frame, lined with 45-mm thick mineral wool**

$\alpha_{\text{Sabine}}$

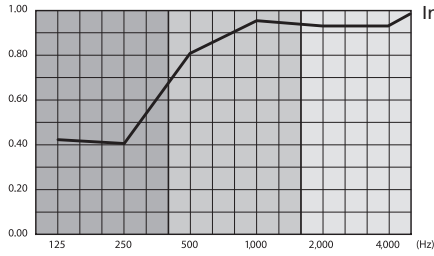


In front of a single layer of 25-mm RI panels – **Vibrasto 30**

	$\alpha_w$	Class	NRC	Frequencies (Hz)	125	250	500	1,000	2,000	4,000
<b>Vibrasto +</b> 25-mm RI panels	0.75 (H)	C	0.80	$\alpha_{\text{Sabine}}$	0.42	0.40	0.81	0.96	0.93	0.93

This traditional wall construction method provides additional sound absorption at low frequencies.

**For Vibrasto stretched and anchored against concrete**

$\alpha_{\text{Sabine}}$

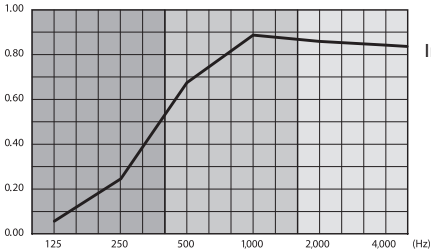

In front of a single layer of 25-mm RI panels – **Vibrasto 30**

	$\alpha_w$	Class	NRC	Frequencies (Hz)	125	250	500	1,000	2,000	4,000
<b>Vibrasto +</b> 25-mm RI panels	0.50 (MH)	D	0.70	$\alpha_{\text{Sabine}}$	0.06	0.26	0.68	0.89	0.87	0.84

PV essais disponibles sur demande – Norme NF EN 20354 / ISO 354.

# Specification

Walls [and ceilings] can be treated with **Texaa**®'s highly flame-resistant **Vibrasto 30** cladding. It is 1,500 mm wide and comprises an outer layer of sound-transparent **Aeria** fabric laminated onto wadding and stretch-fitted in front of RI panels. Its absorption coefficient  $\alpha_w$  when fitted against concrete is 0.50 (MH). The total thickness is then 30 mm.

## European reaction to fire classification


- Facing: B-s1, d0
- RI panel: A2-s1, d0

## Environmental characteristics

HQE: EPD (EN 15804) –

Environmental and Health Product Declarations certified by AFNOR

LEED / BREEAM:

4 points for 

- acoustic contribution
- certified EPD (EN 15804)
- very low VOC (Volatile Organic Compounds) and formaldehyde emissions.

Tensioning battens made from fully recycled materials.

A single 25-mm-thick RI soundabsorbing panel, 80% recycled materials.

Impact on climate change: 5.94 kg CO<sub>2</sub> eq /m<sup>2</sup>

Proportion of recycled components: ≥ 66%

## Performance of **Aeria**

Hydro / Oleophobic ≥ 5 (AATCC118 and AATCC193)

Electrostatic properties 7.10<sup>10</sup> Ω (EN 1149-1)

## Cleaning

Vacuum cleaning, may be removed and refitted

## Guarantee

10 years

## Colours

Select from the 30 colours in the palette

Special colours available on request

## Available options

- Embroidery
- A Grain de Riz (rice grain) knit for the Aeria fabric, 3 colours available (subject to stock levels)

# Fitting methods

The cladding is installed by stretch-fitting the fabric between battens in front of 25-mm RI panels “dot and dab” bonded or fastened to the support surface. The total thickness is then 30 mm.

## Joins

The joins between adjacent lengths are produced as pencil-line joins.

The edges of the **Vibrasto** facing are inserted into U-section battens fitted in line with the join between two lengths. Join-to-join distance: 1,500 mm

## Edging

The edges of the **Vibrasto** facing are inserted into L-shaped battens fitted around the edges of the covered surface (or around the surrounds of openings).

## Covered edging (for visible edging) option

Where an L-shaped batten is fitted along a visible edge, the batten can be delivered already covered with a matching fabric.

## Outside corners

These corners are produced by stretching the facing over a corner batten provided by **Texaa**®.

## Inside corners

These corners are produced as pencil line joins.


## Electrical fittings

Plug sockets, switches etc. are mounted to protrude 28 mm from the surface.


## Layout plan

Different batches of fabric in the same colour may show very slight variations in shade; it is therefore imperative to respect the layout plan drawn up for each wall.


Uncovered batten when edge is not visible

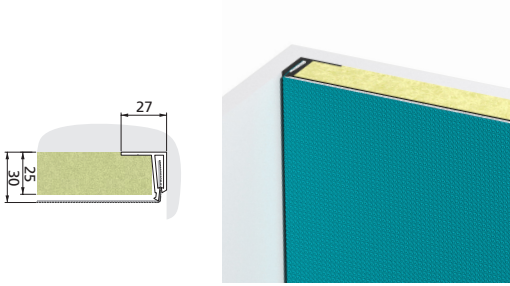


Join-to-join distance: 1,500 mm

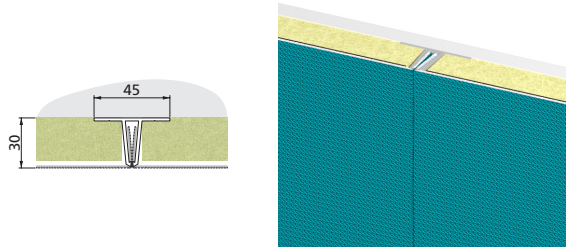


Covered batten when edge is visible

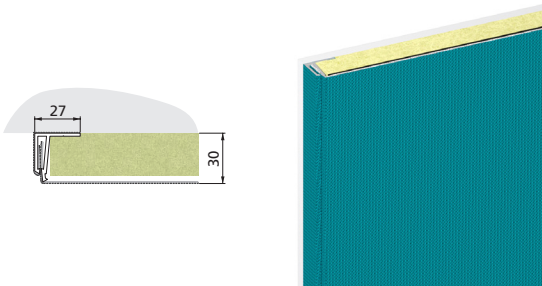


Thin visible edge

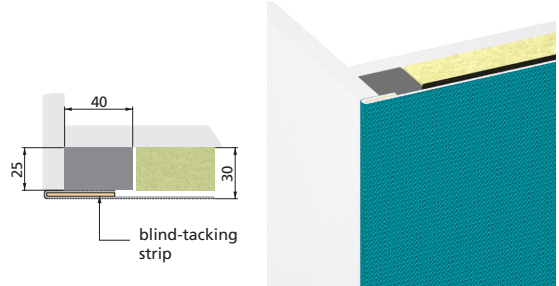


Outside corner using a wooden batten

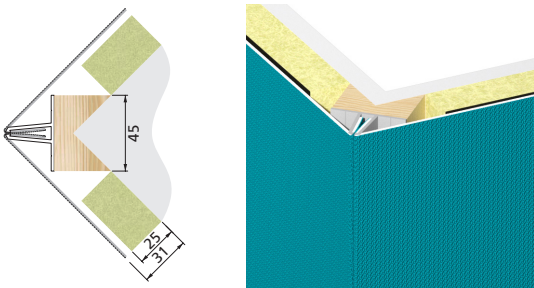

Inside corner

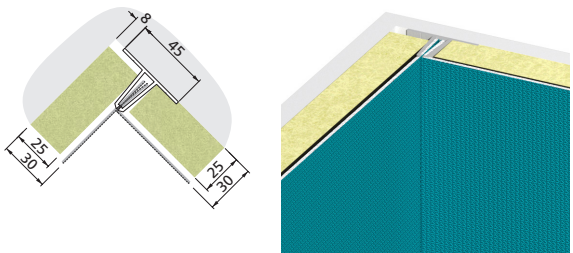

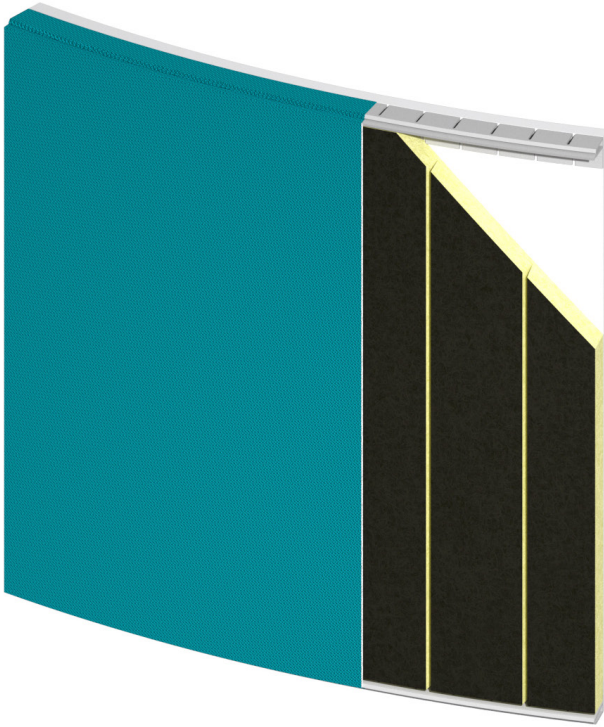

Convex surface



Concave surface



# Aeria - cleaning guidelines

To protect the fresh colour of your **Aeria** fabric, we advise you to clean it regularly by:

- removing dust with a soft brush and vacuum cleaner
- using an absorbent cloth to soak up spilt liquids
- cleaning marks or stains quickly, before they have time to dry and become harder to remove

**Aeria** is treated with a water-repellent product, so any stains can usually be removed by gently dabbing. Never rub the fabric.

**If a stain proves harder to remove, please follow the instructions below:**

## **For water-based liquids (tea, coffee, soft drinks, wine, etc.)**

If the stain has penetrated the fabric, use a vacuum cleaner to remove any dust from the soiled area. Then, rehydrate the stain by dabbing the marked area with one hand using a cloth dampened with clean water, and dry the area with the other hand using a dry, clean absorbent cloth. If the stain persists, repeat the process using water and a little soap.

## **For oil-based liquids**

Dab the stain with a clean cloth dampened with undiluted solvent-based cleaning fluid. Remember to fold the cloth frequently, so that the stain is always in contact with a clean part of the cloth's surface.

## **For semi-solid stains, such as butter, ketchup, etc**

Remove any remaining solid material with a spatula and proceed with the cleaning method detailed above for oil-based liquids.

## **For dye-based stains (marker pen, biro, ink, etc.)**

Dab the stain with a clean cloth dampened with a solvent such as methanol. Remember to fold the cloth frequently, so that the stain is always in contact with a clean part of the cloth's surface.

**In order to avoid the formation of rings, clean stains and marks from the outside towards the middle, and then use a hair-dryer to speed up the drying process.**

# Technical characteristics: Vibrasto 30

Definition	Vibrasto 30
<b>Fitting</b>	Stretch and anchor
<b>Absorbent material/thickness</b>	Black or grey wadding / 3 mm RI panel (+black cloth) / 25 mm
<b>Surface / colours</b>	<b>Aeria*</b> Maille Ronde / 30 colours
<b>Physical properties</b>	
- Weight	Facing: 0.51 kg / m <sup>2</sup> 25-mm RI panel: 1.6 kg / m <sup>2</sup>
- Total thickness	30 mm +0 / -1
- Width	1,520 +10 / -10
- Length	To suit requirements and packaging limitations
- Formability (length or width)	+3 % - 0 %
- Light reflectance (for Nacre (Pearly white) colour, MR 640)	81 %
<b>Durability</b>	
<b>Mechanical properties</b>	
- Abrasion resistance (EN 12947-2, number of rubs)	> 30,000
- Fraying	None
- Variations in dimensions (under normal conditions of temperature and relative humidity)	< 0.1 %
- Colour fastness ISO 105-B02 (scale from 1 to 8)	≥ 5
- Electrostatic properties (EN 1149-1)	7.10 <sup>10</sup> Ω
- Hydro/Oleophobia AATCC118 and AATCC193 (scale from 1 to 8)	≥ 5
- Conditions of normal exposure	Relative humidity between 30% and 75% and temperature between 10°C and 30°C
- Conditions of exceptional exposure	Relative humidity between 20% and 90% and temperature between 10°C and 30°C
<b>Health and safety</b>	
<b>European reaction to fire classification</b>	
- Europe EN	Facing: B-s1, d0 RI panel: A2-s1, d0
<b>Environmental characteristics</b>	
<b>Development of micro-organisms</b>	The materials used reduce the proliferation of house dust mites and micro-organisms
<b>HQE® High Quality Environmental standard</b> (standart EN 15804)	AFNOR-certified environmental product declaration
<b>VOC and formaldehyde emissions</b> (ISO 16000) French health labelling / in accordance with German protocol AgBB	A+ / compliant
<b>Contribution to LEED/BREEAM certification</b> - certified EPDn - air emissions - acoustic contribution	4 points
<b>Impact on climate change</b>	5.94 kg CO <sub>2</sub> eq /m <sup>2</sup>
<b>Proportion of recycled components</b>	≥ 66 %
<b>Cleaning</b>	
Method	Vacuum clean every one to five years, depending on conditions of use**  Removable

\* Texaa®'s internationally patented **Aeria** sound-transparent fabric / \*\* refer to the cleaning and maintenance sheets



**Texaa®** is a privately owned company with a staff of fifty-five. Informed by continuous contact with designers and professionals in the building industry, we conceive, manufacture and distribute solutions to enhance the acoustic comfort of the spaces in which people live and work. **Texaa®** products are technically sophisticated, sensitive and hard-wearing. Their hallmark is the textile in which they are clad: **Aeria\*** is knitted in our workshop near Bordeaux in a palette of 30 colours. Since 1978, it has been our pride and delight to play our part in developing quality architecture in France, Europe, the US and beyond.

\* our sound-transparent textile with an exclusive **Texaa®** patent

## Updates at [www.texaa.co.uk](http://www.texaa.co.uk)

- - -

**Texaa®**  
textile, acoustics, architecture

**United Kingdom**  
Becket House  
1 Lambeth Palace Road  
London SE1 7EU

- - -  
+44 (0) 20 7092 3435  
contact@texaa.co.uk  
[www.texaa.co.uk](http://www.texaa.co.uk)

**USA**  
2825 East Cottonwood Parkway  
Suite 500 Salt Lake City,  
UT 84121

- - -  
salesusa@texaa.com  
[www.texaa.com](http://www.texaa.com)